


Wiring scheme for 20 pin DIL to QFN20.

DIL20	QFN20
1	1
2	2
...	...
20	20

QFN20

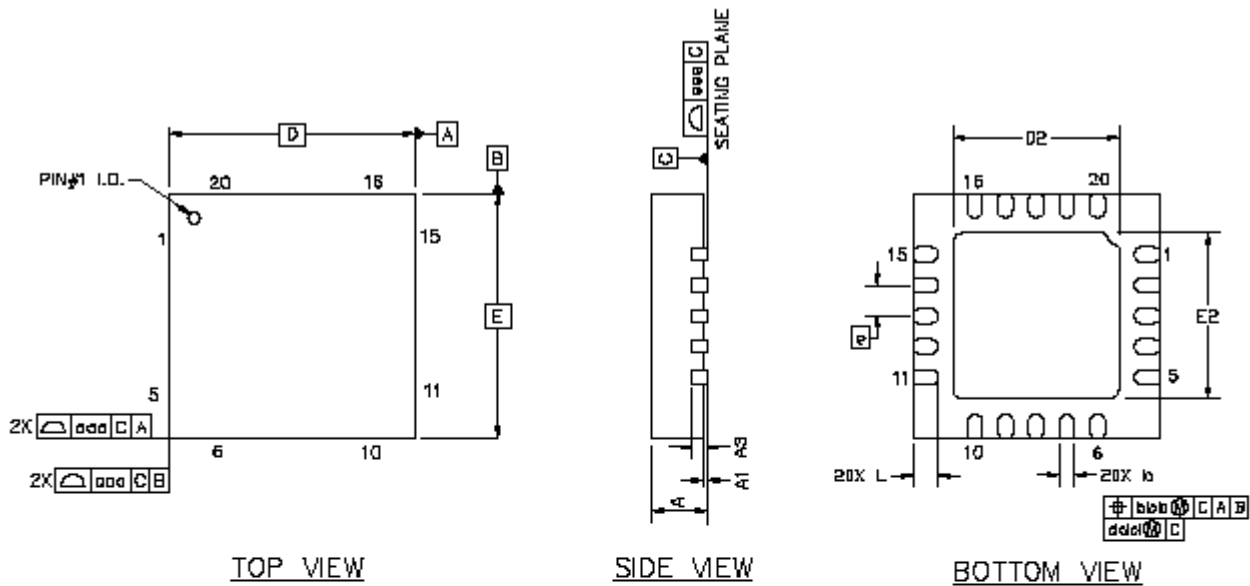

Dimension	Millimeters		
	Min	Nom	Max
A	0.80	0.90	1.00
A1	0.03	0.07	0.11
A3	0.25 REF		
b	0.18	0.25	0.30
D	4.00 BSC.		
D2	2.55	2.70	2.85
e	0.50 BSC.		

Dimension	Millimeters		
	Min	Nom	Max
E	4.00 BSC.		
E2	2.55	2.70	2.85
L	0.30	0.40	0.50
aaa	—	—	0.15
bbb	—	—	0.10
ddd	—	—	0.05
eee	—	—	0.08