


Wiring scheme for 24 pin DIL to QFN24.

DIL24	QFN24
1	1
2	2
...	...
24	24

## QFN24

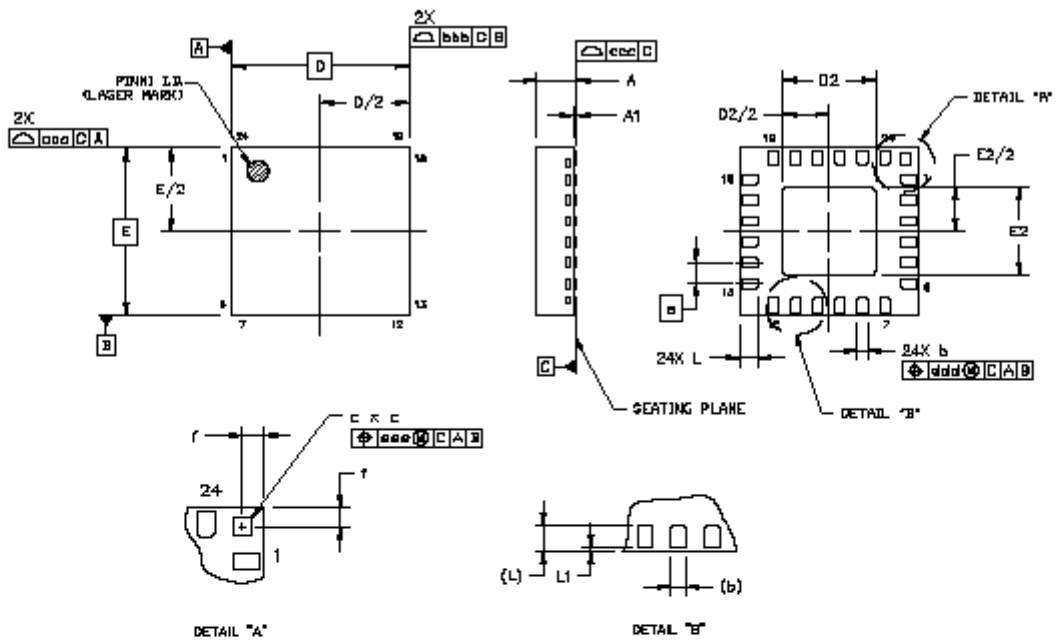

Dimension	Millimeters		
	Min	Nom	Max
A	0.80	0.85	0.90
A1	0.00	0.02	0.05
b	0.18	0.25	0.30
c	0.19	0.24	0.29
D	4.00 BSC.		
D2	2.00	2.10	2.20
e	0.50 BSC.		
f	0.27 BSC		
E	4.00 BSC.		

Dimension	Millimeters		
	Min	Nom	Max
E2	2.00	2.10	2.20
L	0.30	0.40	0.50
L1	0.03	0.05	0.08
aaa	—	—	0.10
bbb	—	—	0.10
ccc	—	—	0.08
ddd	—	—	0.10
eee	—	—	0.10